


Make sure "Pro Controller Wired Communication" is On.
*above V3.0

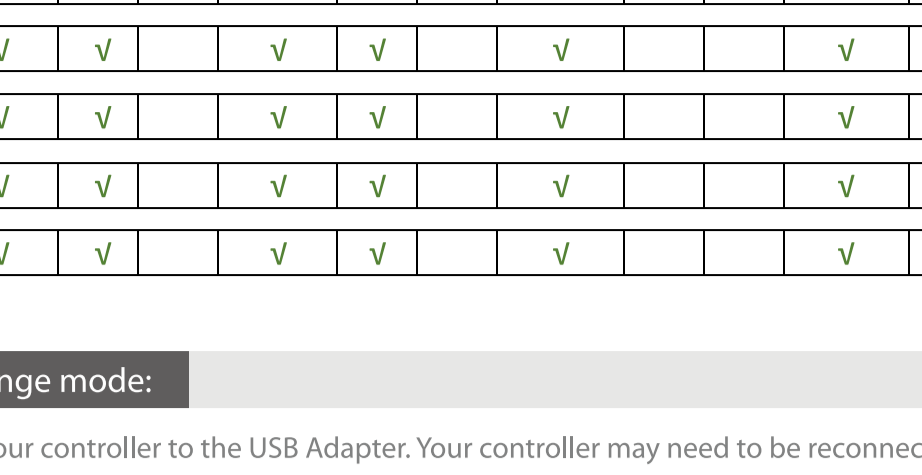

8BitDo USB Wireless Adapter Functionality Chart


Controller	Switch			PlayStation			Xbox			Mac		
	Basic functionality	Vibration	Motion controls	Basic functionality	Vibration	Motion controls	Basic functionality	Vibration	Motion controls	Basic functionality	Vibration	Motion controls
SN30 Pro/SF30 Pro	√	√		√	√		√			√		
PS4	√	√		√	√		√			√		
Joy-Con	√	√		√	√		√			√		
Wii Remote	√	√		√	√		√			√		
Wii U Pro	√	√		√	√		√			√		

Quick change mode:

1. Connect your controller to the USB Adapter. Your controller may need to be reconnected after switching mode.
- Switch: Automatic.
- X-Input: press and hold SELECT+UP for 3 seconds.
- D-Input: press and hold SELECT+LEFT for 3 seconds.
- macOS: press and hold SELECT+RIGHT for 3 seconds.


For Wii U Pro controller

1. Insert USB Adapter into console and then press the pairing button (the LED will rapidly blink).
2. Press your Wii U Pro controller's sync button.
3. Wait until your USB Adapter's LED is solid blue and the controller's #1 LED stay on.
4. For next connection only need to press A button.

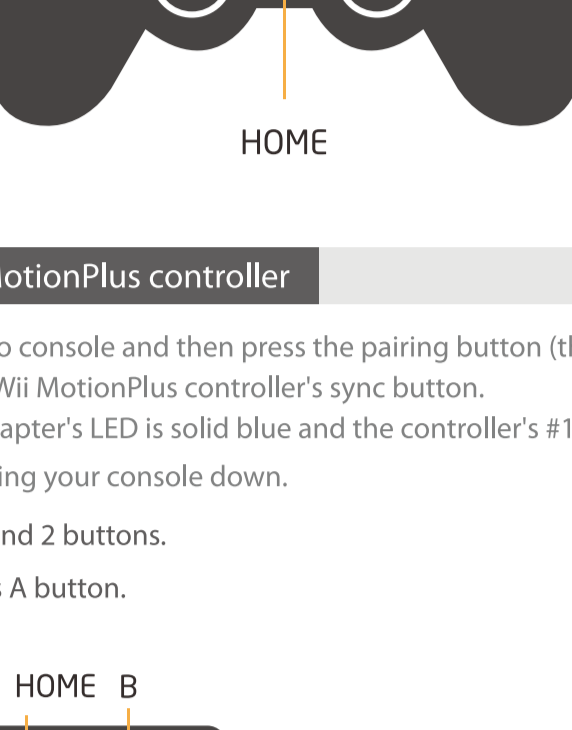

For PS3 controller


1. Download and Run 8BitDo USB Adapter Tools on your PC available for Mac and PC.
2. On your USB Adapter, hold down the pairing button and connect it to your MAC/PC via USB.
3. Connect your PS3 controller to MAC/PC via USB.
4. Once your USB Adapter and PS3 controller are both connected via USB, click the "Pair" button in the software.
5. Once pairing is complete, you can insert your USB Adapter into your console.
6. Now press the PS button on your PS3 controller.
7. Wait until your USB Adapter's LED is solid blue and the controller's #1 LED stay on.
8. To re-sync after powering your console down, begin from step 6.

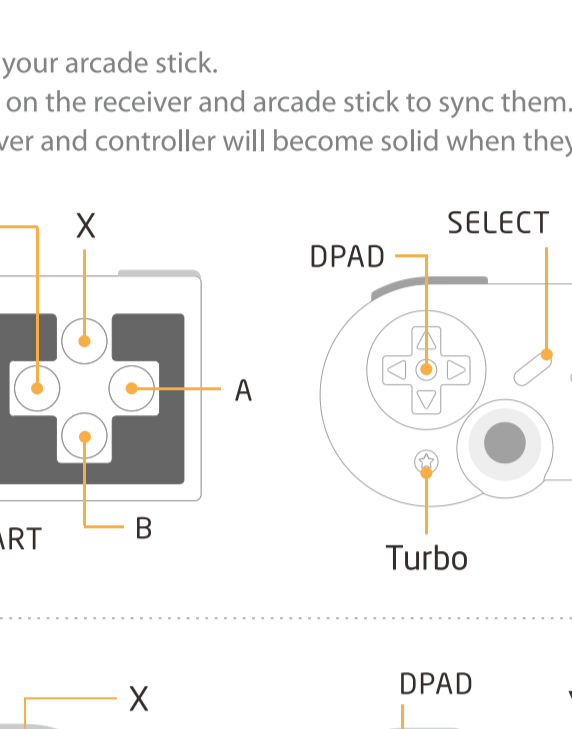

For Wii Remote/Wii MotionPlus controller


1. Insert USB Adapter into console and then press the pairing button (the LED will rapidly blink).
2. Press your Wii Remote/Wii MotionPlus controller's sync button.
3. Wait until your USB Adapter's LED is solid blue and the controller's #1 LED stay on.
4. To re-sync after powering your console down.

For Wii Remote: press 1 and 2 buttons.
For Wii MotionPlus: press A button.

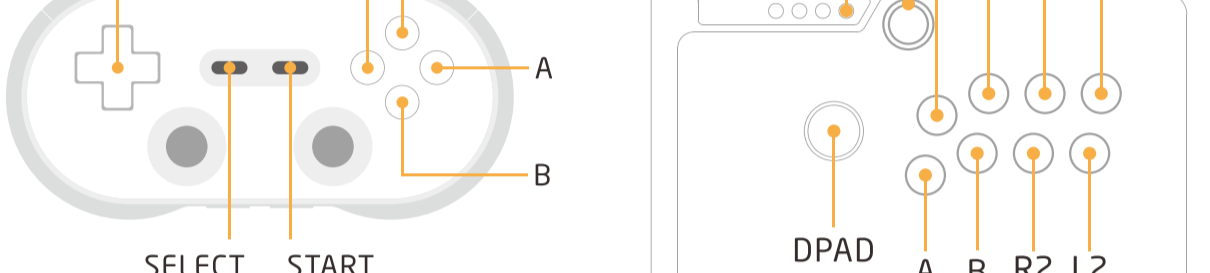

For 8Bitdo controllers

- SN30 Pro/SF30 Pro:
1. Press START+FB to turn on your SN30 Pro/SF30 Pro controller.
 2. Press both PAIR buttons on the receiver and controller to sync them.
 3. Both LEDs on the receiver and controller will become solid when they are successfully paired.
- N30 Pro/F30 Pro:
1. Press POWER to turn on your controller.
 2. Press both PAIR buttons on the receiver and controller to sync them.
 3. Both LEDs on the receiver and controller will become solid when they are successfully paired.
- N30/F30/SN30/SF30/Zero:
1. Press START to turn on your controller.
 2. Press both PAIR button on the receiver and SELECT on the controller to sync them.
 3. Both LEDs on the receiver and controller will become solid when they are successfully paired.
- N30 Arcade Stick:
1. Press HOME to turn on your arcade stick.
 2. Press both PAIR button on the receiver and arcade stick to sync them.
 3. Both LEDs on the receiver and controller will become solid when they are successfully paired.

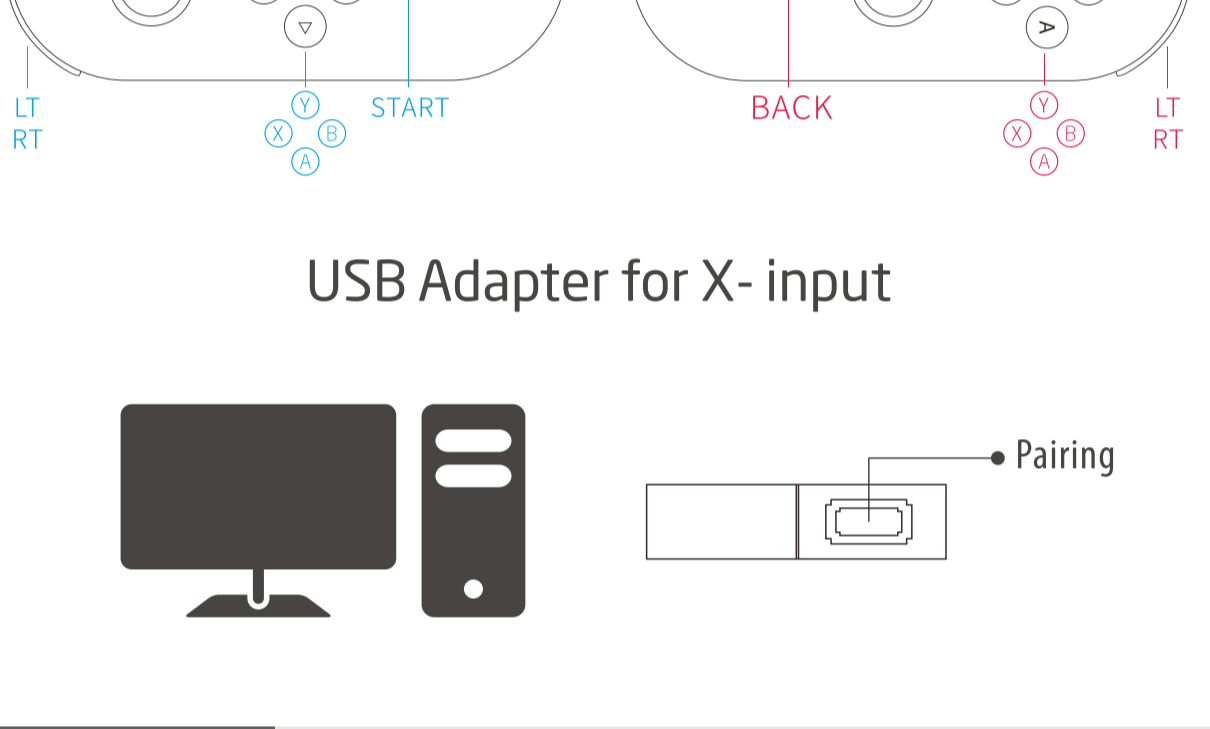


For Joy-Con

1. Press SYNC button on Joy-Con for 3 seconds, LED starts to rotate from left to right.
 2. Connect the USB Wireless Adapter to your device.
 3. Press pair button on the USB Wireless Adapter to enter its pairing mode, LED starts to blink rapidly.
 4. LED becomes solid when connection is successful.
- Joy-Con will auto reconnect to the adapter with the press of any button once it has been paired.




USB Adapter for X- input

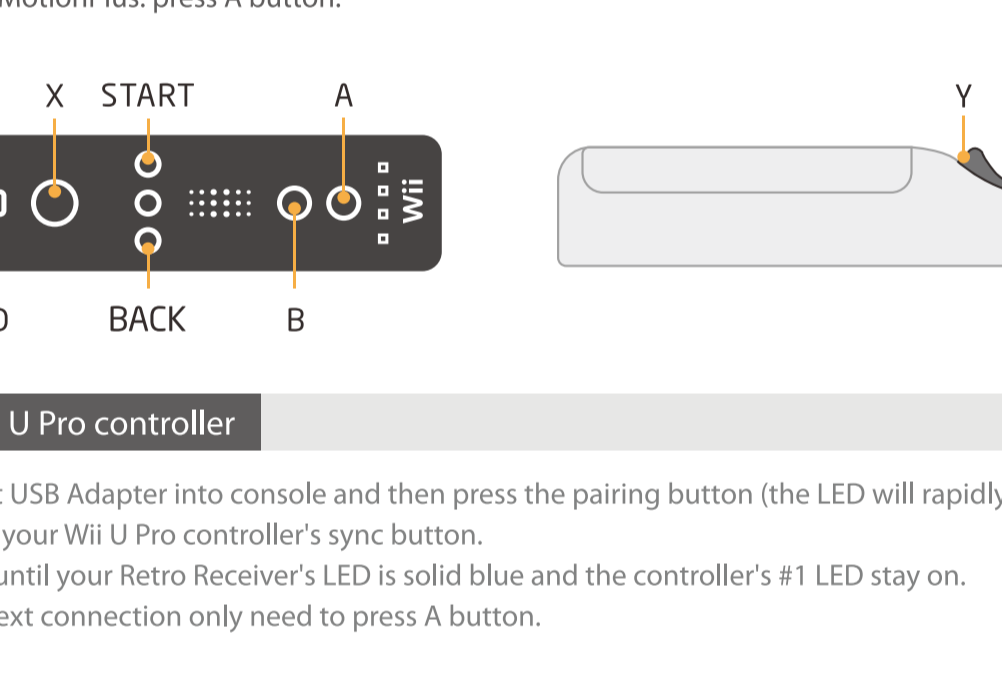

For PS3 controller


1. Download and Run 8BitDo USB Adapter Tools on your PC available for Mac and PC.
2. On your Retro Receiver, hold down the pairing button and connect it to your MAC/PC via USB.
3. Connect your PS3 controller to MAC/PC via USB.
4. Once your Retro Receiver and PS3 controller are both connected via USB, click the "Pair" button in the software.
5. Once pairing is complete, you can insert your Retro Receiver into your console.
6. Now press the PS button on your PS3 controller.
7. Wait until your Retro Receiver's LED is solid blue and the controller's #1 LED stay on.
8. To re-sync after powering your console down, begin from step 6.

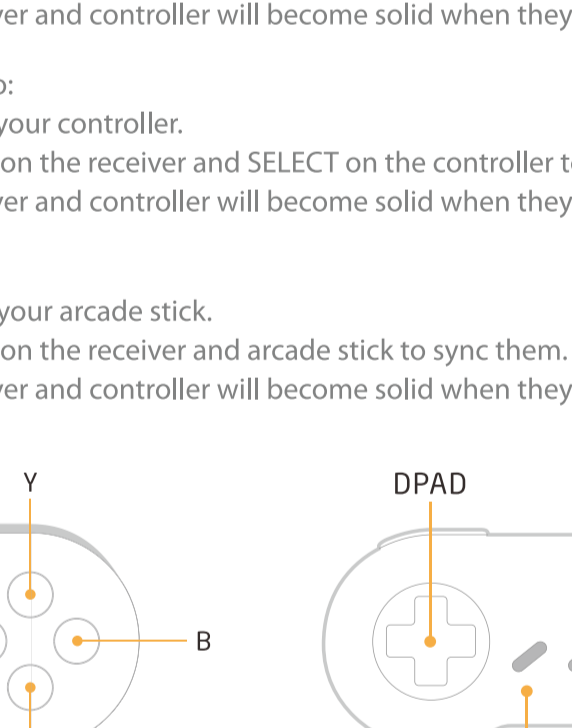

For Wii Remote/Wii MotionPlus controller


1. Insert USB Adapter into console and then press the pairing button (the LED will rapidly blink)
2. Press the Wii Remote/Wii MotionPlus controller's sync button.
3. Wait until your Retro Receiver's LED is solid blue and the controller's #1 LED stay on.
4. To re-sync after powering your console down.

For Wii Remote: press 1 and 2 buttons.
For Wii MotionPlus: press A button.

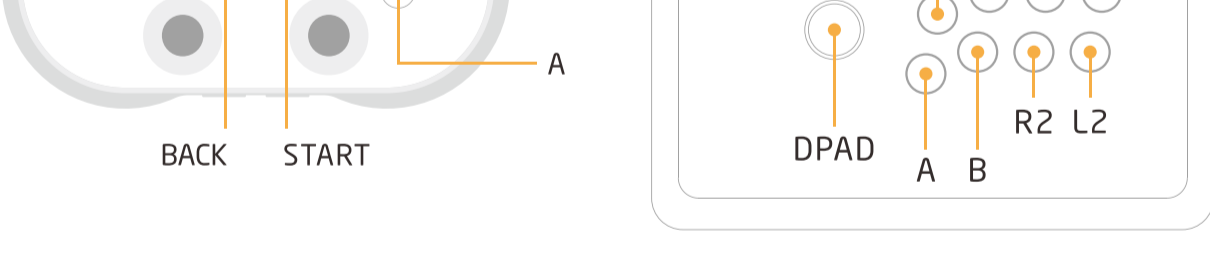


For Wii U Pro controller

1. Insert USB Adapter into console and then press the pairing button (the LED will rapidly blink).
2. Press your Wii U Pro controller's sync button.
3. Wait until your Retro Receiver's LED is solid blue and the controller's #1 LED stay on.
4. For next connection only need to press B button.

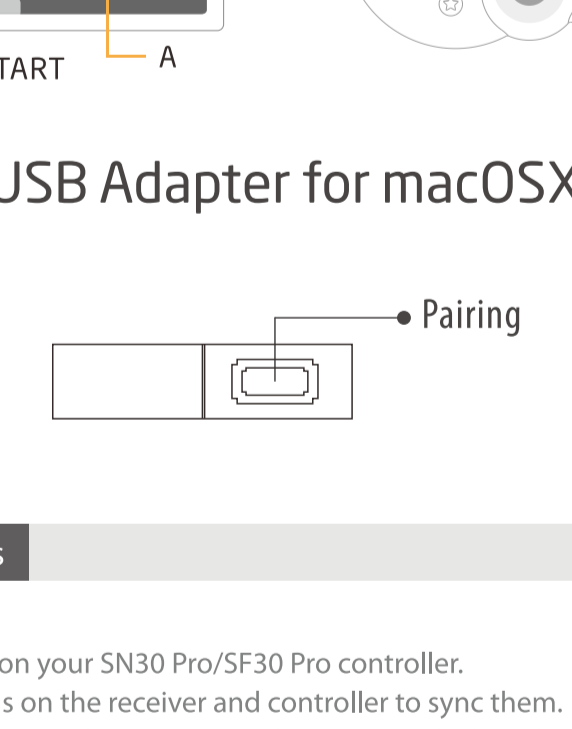


For 8Bitdo controllers

- SN30 Pro/SF30 Pro:
1. Press START+B to turn on your SN30 Pro/SF30 Pro controller.
 2. Press both PAIR buttons on the receiver and controller to sync them.
 3. Both LEDs on the receiver and controller will become solid when they are successfully paired.
- N30 Pro/F30 Pro:
1. Press POWER to turn on your controller.
 2. Press both PAIR buttons on the receiver and controller to sync them.
 3. Both LEDs on the receiver and controller will become solid when they are successfully paired.
- N30/F30/SN30/SF30/Zero:
1. Press START to turn on your controller.
 2. Press both PAIR button on the receiver and SELECT on the controller to sync them.
 3. Both LEDs on the receiver and controller will become solid when they are successfully paired.
- N30 Arcade Stick:
1. Press HOME to turn on your arcade stick.
 2. Press both PAIR button on the receiver and arcade stick to sync them.
 3. Both LEDs on the receiver and controller will become solid when they are successfully paired.

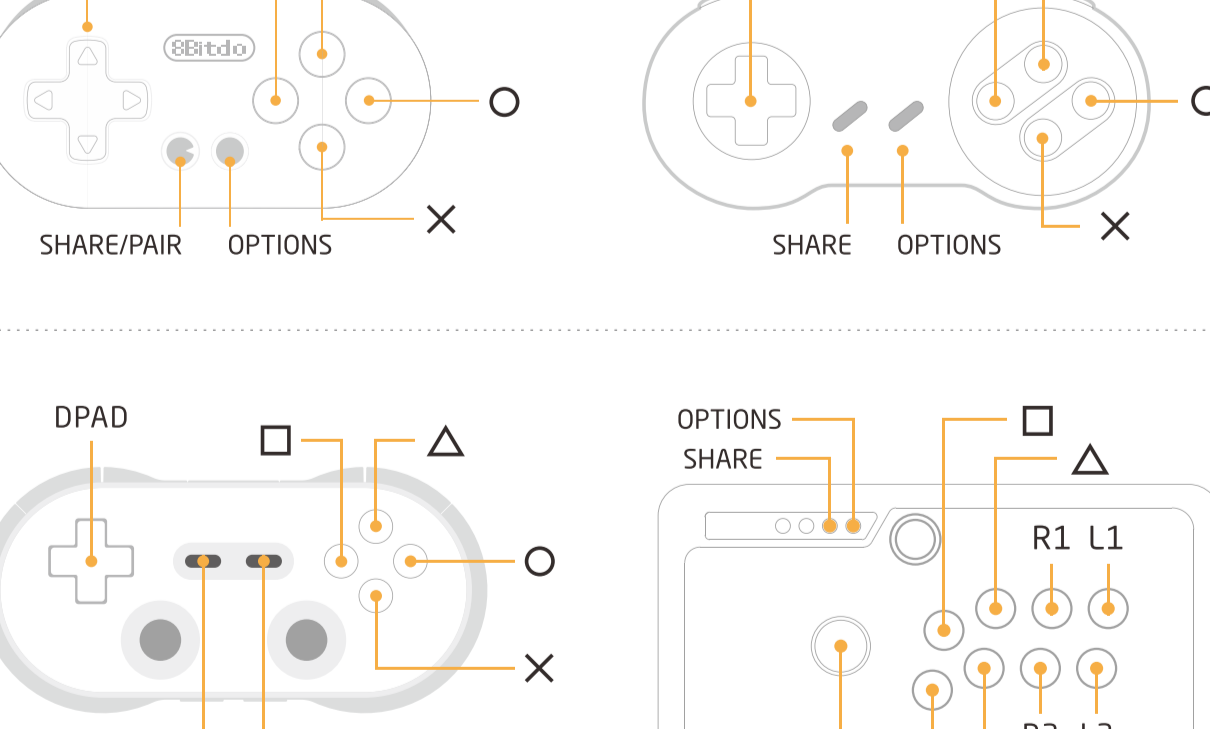

USB Adapter for macOSX

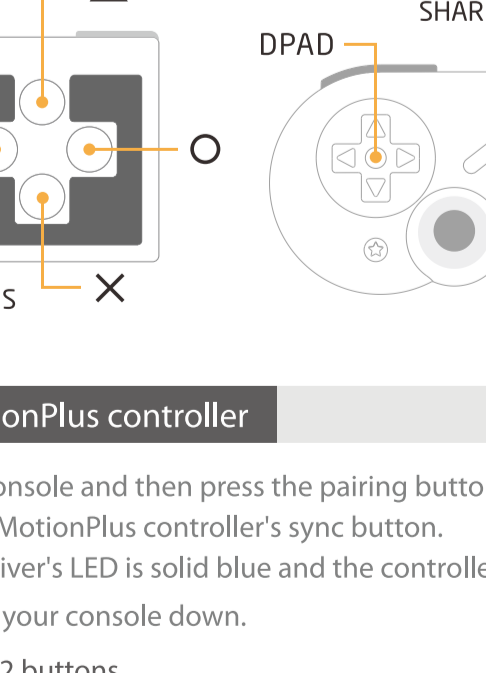

For 8Bitdos controllers

- SN30 Pro/SF30 Pro:
1. Press START+B to turn on your SN30 Pro/SF30 Pro controller.
 2. Press both PAIR buttons on the receiver and controller to sync them.
 3. Both LEDs on the receiver and controller will become solid when they are successfully paired.
- N30 Pro/F30 Pro:
1. Press POWER to turn on your controller.
 2. Press both PAIR buttons on the receiver and controller to sync them.
 3. Both LEDs on the receiver and controller will become solid when they are successfully paired.
- N30/F30/SN30/SF30/Zero:
1. Press START to turn on your controller.
 2. Press both PAIR button on the receiver and SELECT on the controller to sync them.
 3. Both LEDs on the receiver and controller will become solid when they are successfully paired.
- N30 Arcade Stick:
1. Press HOME to turn on your arcade stick.
 2. Press both PAIR button on the receiver and arcade stick to sync them.
 3. Both LEDs on the receiver and controller will become solid when they are successfully paired.



For Wii Remote/Wii MotionPlus controller

1. Insert USB Adapter into console and then press the pairing button (the LED will rapidly blink)
2. Press the Wii Remote/Wii MotionPlus controller's sync button.
3. Wait until your Retro Receiver's LED is solid blue and the controller's #1 LED stay on.
4. To re-sync after powering your console down.

For Wii Remote: press 1 and 2 buttons.
For Wii MotionPlus: press A button.



For Wii U Pro controller

1. Insert USB Adapter into console and then press the pairing button (the LED will rapidly blink).
2. Press your Wii U Pro controller's sync button.
3. Wait until your Retro Receiver's LED is solid blue and the controller's #1 LED stay on.
4. For next connection only need to press A button.

连接 Joy-Con/Pro 手柄

1. Press SYNC button on Joy-Con for 3 seconds, LED starts to rotate from left to right.
 2. Connect the USB Wireless Adapter to your device.
 3. Press pair button on the USB Wireless Adapter to enter its pairing mode, LED starts to blink rapidly.
 4. LED becomes solid when connection is successful.
- Joy-Con will auto reconnect to the adapter with the press of any button once it has been paired.

